



## TS & FS SERIES – TILT & FLOAT SWITCHES

### MODELS:

#### STANDARD SERIES

PVC / STAINLESS STEEL

#### MINI-SERIES

PVC / STAINLESS STEEL

#### CONE SERIES

#### FLOAT SERIES

HIGH LEVEL / LOW LEVEL

NOTE: Standard Tilt Switches are omni-directional. Directional Tilt switches are available in standard housing and mini housings.

### SPECIFICATIONS:


#### TILT ANGLES

Standard Tilt Angles available which are used to meet specific degrees of tilt angles specified.

**15 deg.      30 deg.      45 deg.**

#### Available Housing

Stainless Steel      PVC      UHMW

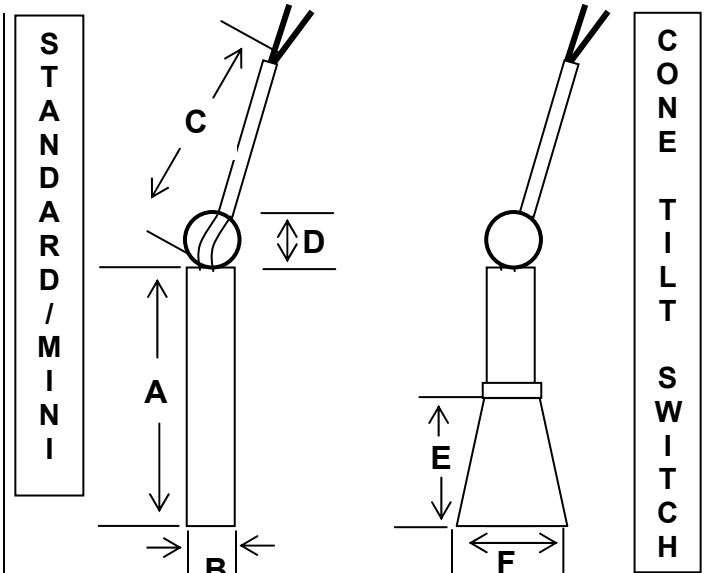

**MINI SERIES**

**A= 5"**  
**B= 1.015" (PVC)**  
**= .875" (STAINLESS STEEL)**  
**C= 6 FOOT (18/3 RUBBER JACKET CABLE)**  
**D= ¼ "EYE HOOK**


**CONE SERIES**  
**E= 4" F= 3"**

**SWITCH CONTACT RATINGS:**  
 2 AMP to 12.5 AMP @ 120 VAC  
 (Depending on switch type used)



**All switches encapsulated with high Temp, flexible, GE™ potting compound**

F  
L  
O  
A  
T  
  
S  
W  
I  
T  
C  
H

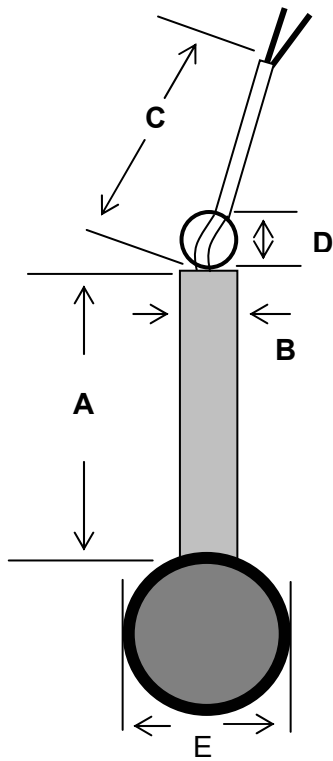

**FLOAT SWITCH SERIES**  
A = 8 INCHES  
B = 1 INCH  
C = 6 FOOT (18/3 RUBBER JACKET CABLE)  
D = 5/16 INCH EYE  
E = 3 INCH DIAMETER FLOAT BULB  
  
SMALLER VERSIONS CAN BE SUPPLIED

