



417 Wards Corner Rd. Loveland, Ohio 45140
 Phone: 513.398.2500-800.659.8250 Fax: 513.398.2536

TS & FS SERIES – TILT & FLOAT SWITCHES

MODELS:

STANDARD SERIES
 PVC / STAINLESS STEEL

MINI-SERIES
 PVC / STAINLESS STEEL

CONE SERIES: PVC

FLOAT SERIES
 HIGH LEVEL / LOW LEVEL

NOTE: Standard Tilt Switches are omni-directional. Directional Tilt switches are available in standard housing and mini housings.

SPECIFICATIONS:


TILT ANGLES

Standard Tilt Angles available which are used to meet specific degrees of tilt angles specified.

15 deg. 30 deg. 45 deg.

Available Housing

Stainless Steel PVC

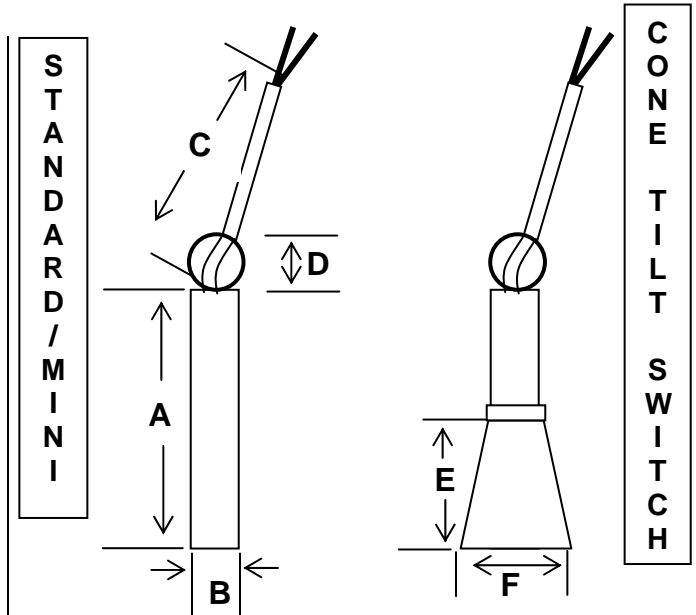

STANDARD SERIES
 A=8"
 B=1.25"
 C=6 FOOT (18/3 RUBBER JACKET CABLE)
 D=5/16" EYE HOOK

MINI SERIES
 A= 5"
 B= 1.015" (PVC)
 = .875" (STAINLESS STEEL)
 C= 6 FOOT (18/3 RUBBER JACKET CABLE)
 D= 1/4 "EYE HOOK

CONE SERIES
 E= 4" F= 3"


SWITCH CONTACT RATINGS:
 2 AMP to 12.5 AMP @ 120 VAC
 (Depending on switch type used)



All switches encapsulated with high Temp, flexible, GE™ potting compound

F
L
O
A
T

S
W
I
T
C
H

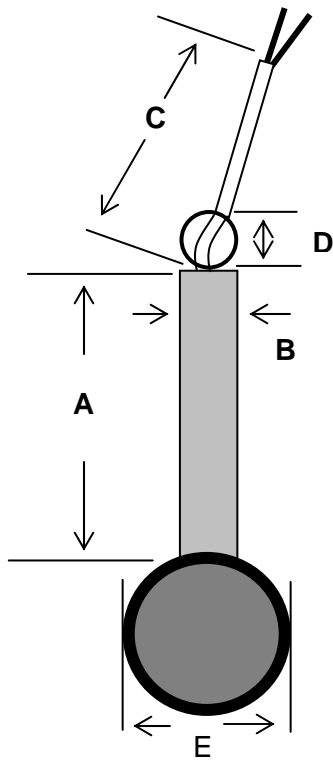

FLOAT SWITCH SERIES
A = 8 INCHES
B = 1 INCH
C = 6 FOOT (18/3 RUBBER JACKET CABLE)
D = 5/16 INCH EYE
E = 3 INCH DIAMETER FLOAT BULB

SMALLER VERSIONS CAN BE SUPPLIED

